

3. GRAPHS


- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ *testing bipartiteness*
- ▶ *connectivity in directed graphs*
- ▶ *DAGs and topological ordering*

Lecture slides by Kevin Wayne

Copyright © 2005 Pearson-Addison Wesley

Copyright © 2013 Kevin Wayne

<http://www.cs.princeton.edu/~wayne/kleinberg-tardos>

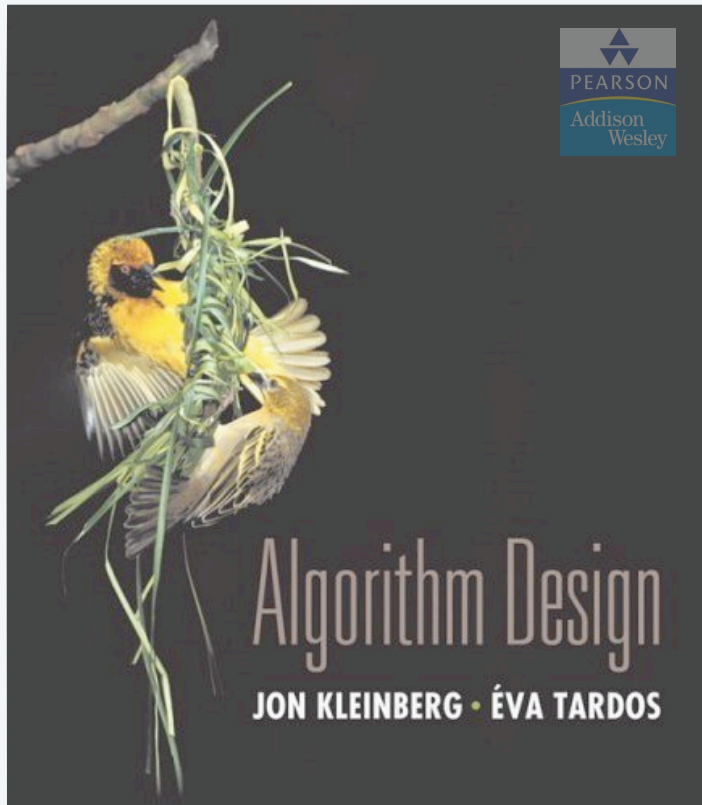

SECTION 3.1


3. GRAPHS

- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ *testing bipartiteness*
- ▶ *connectivity in directed graphs*
- ▶ *DAGs and topological ordering*

Undirected graphs

Notation. $G = (V, E)$

- V = nodes.
- E = edges between pairs of nodes.
- Captures pairwise relationship between objects.
- Graph size parameters: $n = |V|, m = |E|$.

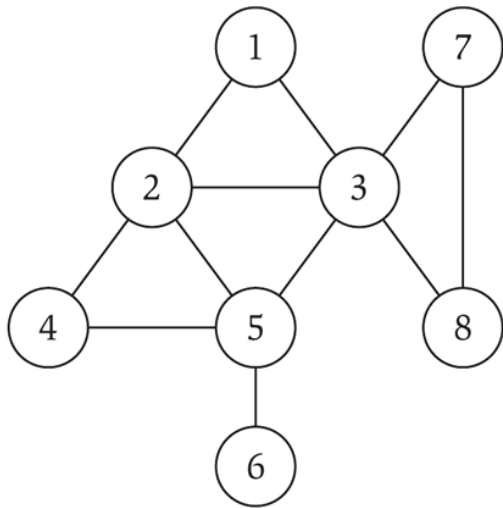


$$V = \{ 1, 2, 3, 4, 5, 6, 7, 8 \}$$


$$E = \{ 1-2, 1-3, 2-3, 2-4, 2-5, 3-5, 3-7, 3-8, 4-5, 5-6, 7-8 \}$$

$$m = 11, n = 8$$

One week of Enron emails

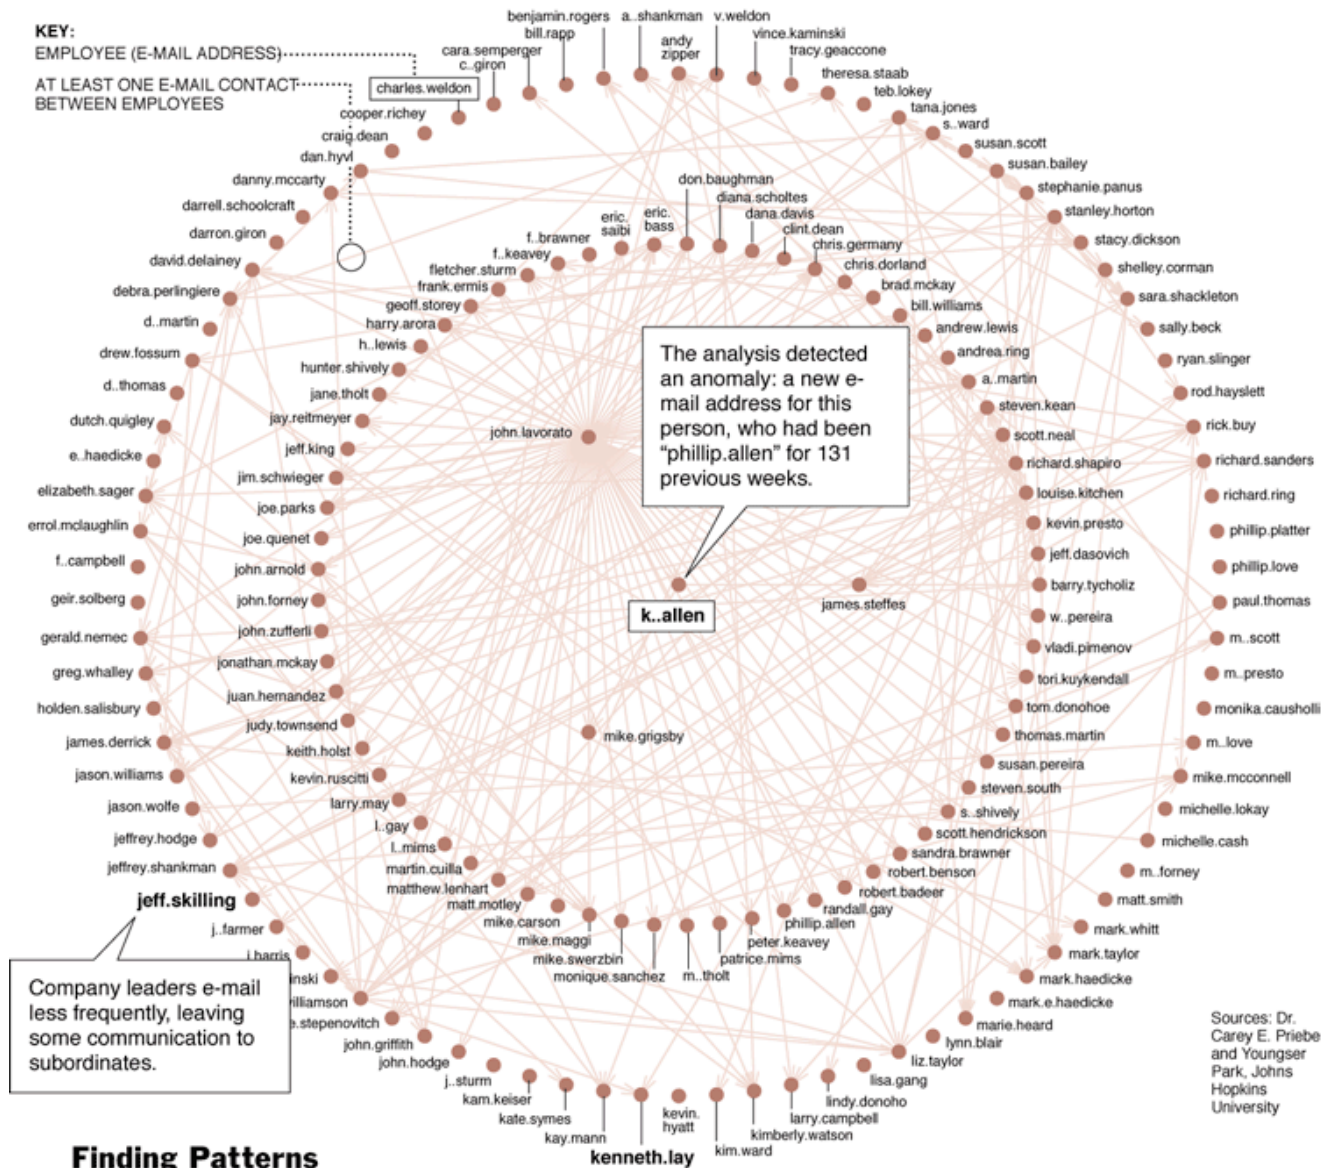

The evolution of FCC lobbying coalitions

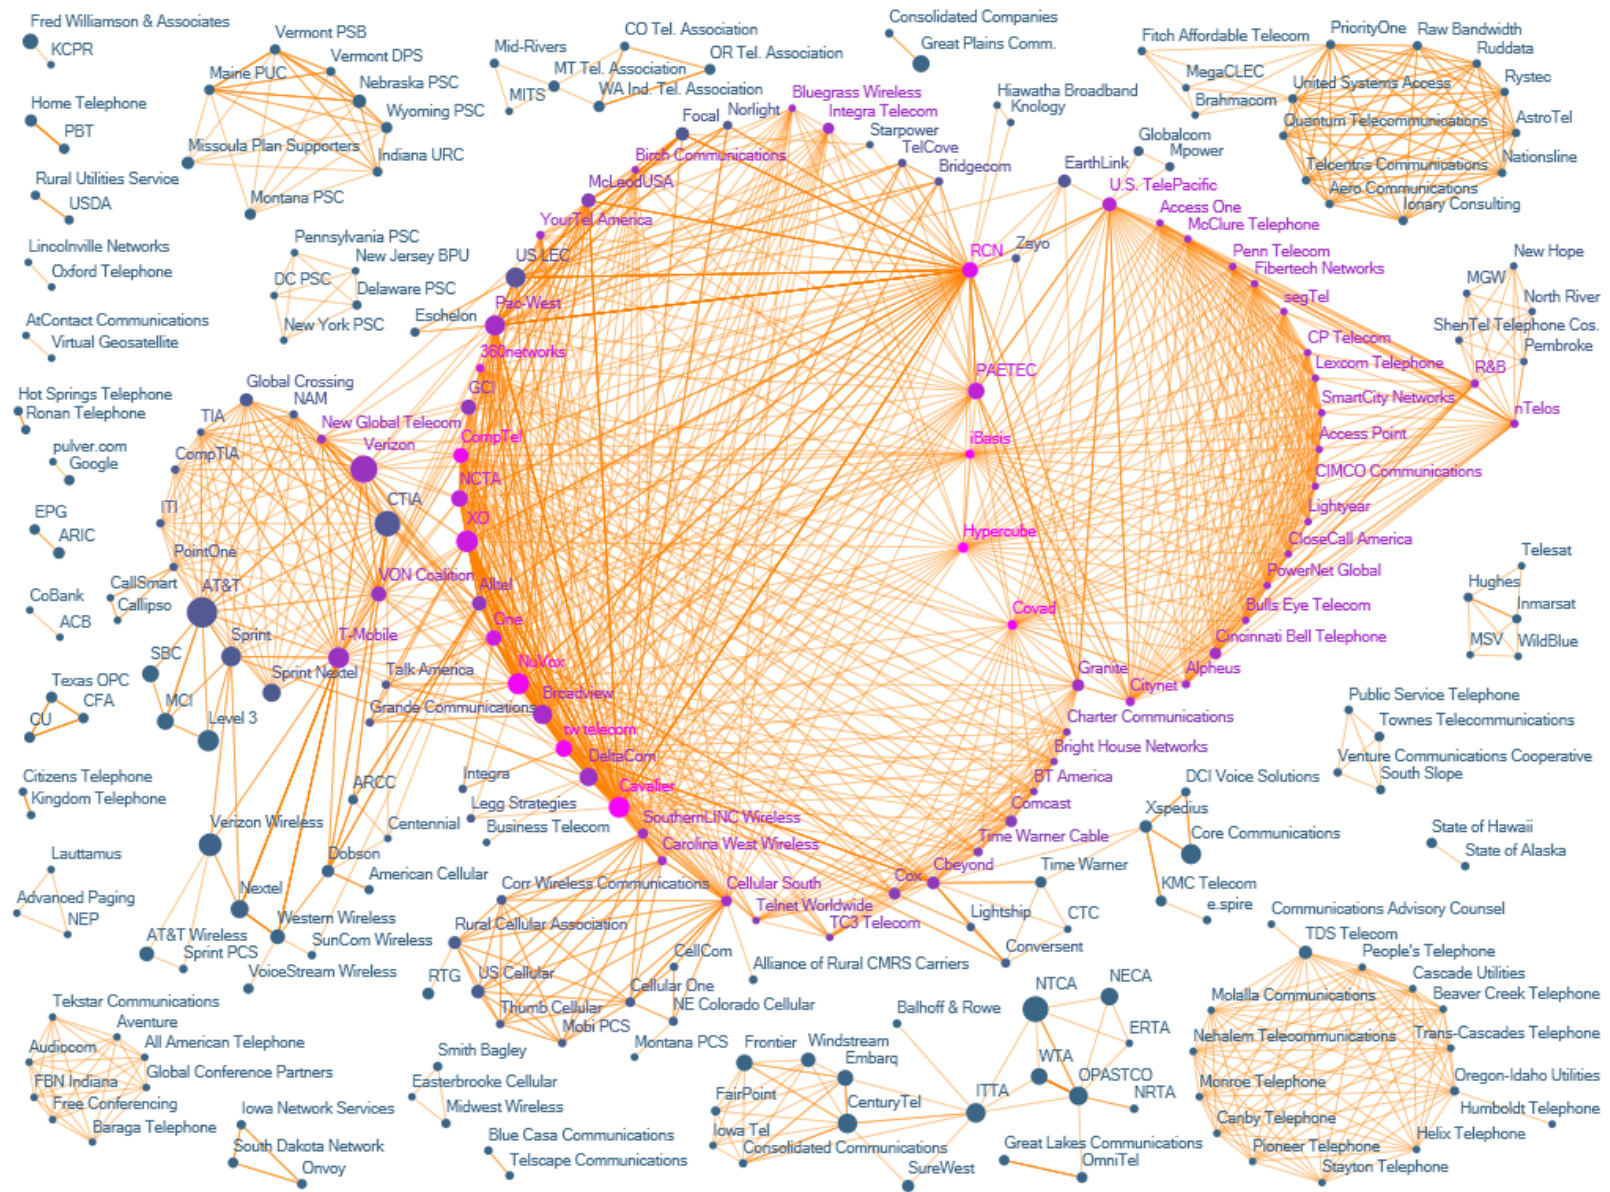

Framingham heart study

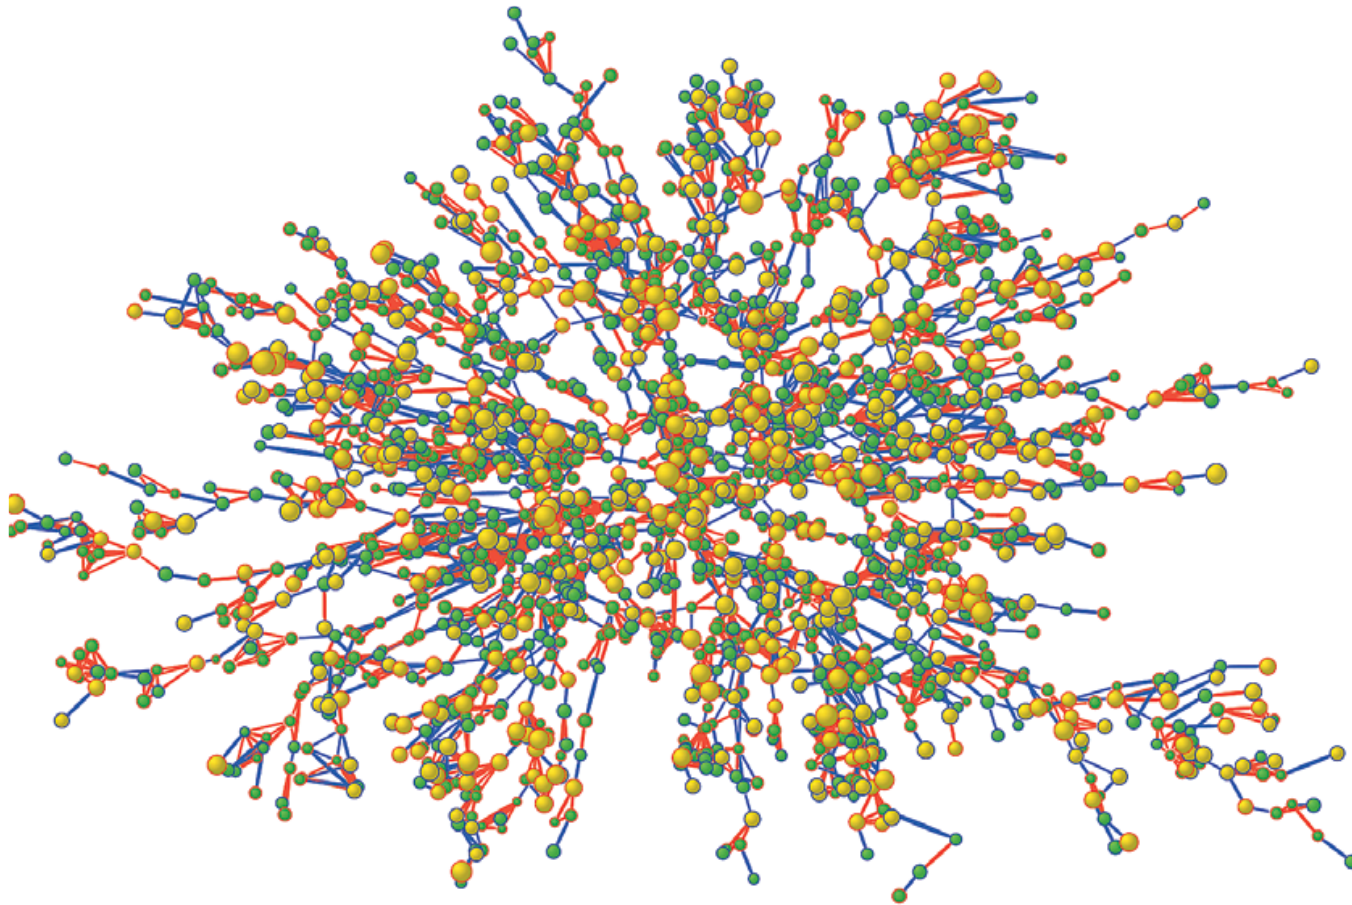


Figure 1. Largest Connected Subcomponent of the Social Network in the Framingham Heart Study in the Year 2000.

Each circle (node) represents one person in the data set. There are 2200 persons in this subcomponent of the social network. Circles with red borders denote women, and circles with blue borders denote men. The size of each circle is proportional to the person's body-mass index. The interior color of the circles indicates the person's obesity status: yellow denotes an obese person (body-mass index, ≥ 30) and green denotes a nonobese person. The colors of the ties between the nodes indicate the relationship between them: purple denotes a friendship or marital tie and orange denotes a familial tie.


Some graph applications

graph	node	edge
communication	telephone, computer	fiber optic cable
circuit	gate, register, processor	wire
mechanical	joint	rod, beam, spring
financial	stock, currency	transactions
transportation	street intersection, airport	highway, airway route
internet	class C network	connection
game	board position	legal move
social relationship	person, actor	friendship, movie cast
neural network	neuron	synapse
protein network	protein	protein-protein interaction
molecule	atom	bond

Graph representation: adjacency matrix

Adjacency matrix. n -by- n matrix with $A_{uv} = 1$ if (u, v) is an edge.

- Two representations of each edge.
- Space proportional to n^2 .
- Checking if (u, v) is an edge takes $\Theta(1)$ time.
- Identifying all edges takes $\Theta(n^2)$ time.

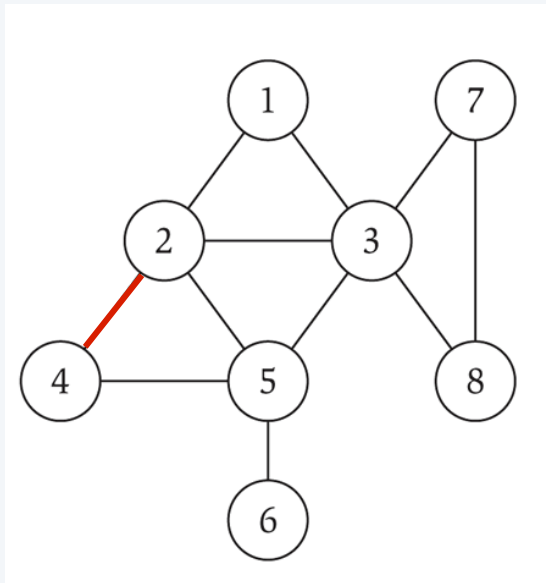



	1	2	3	4	5	6	7	8
1	0	1	1	0	0	0	0	0
2	1	0	1	1	1	0	0	0
3	1	1	0	0	1	0	1	1
4	0	1	0	0	1	0	0	0
5	0	1	1	1	0	1	0	0
6	0	0	0	0	1	0	0	0
7	0	0	1	0	0	0	0	1
8	0	0	1	0	0	0	1	0

Graph representation: adjacency lists

Adjacency lists. Node indexed array of lists.

- Two representations of each edge.
- Space is $\Theta(m + n)$.
- Checking if (u, v) is an edge takes $O(\text{degree}(u))$ time.
- Identifying all edges takes $\Theta(m + n)$ time.

degree = number of neighbors of u

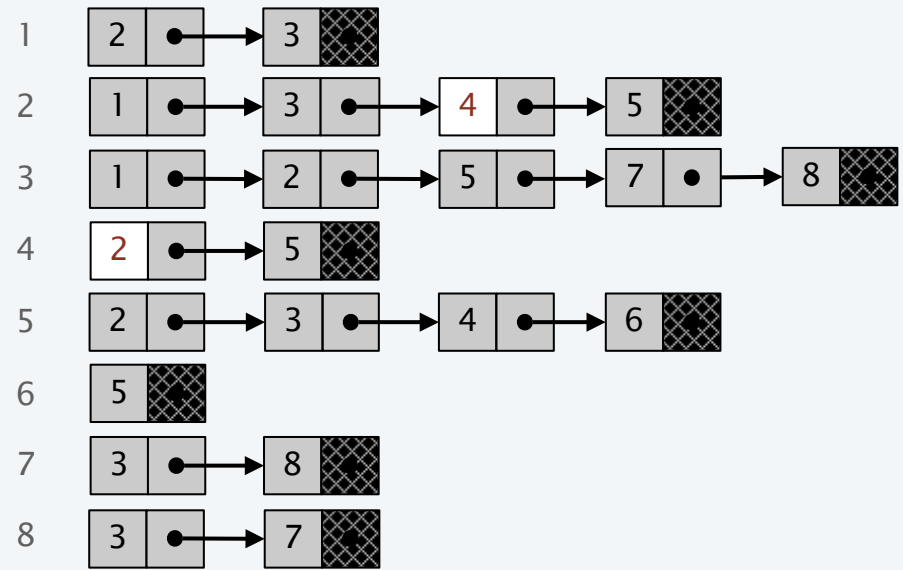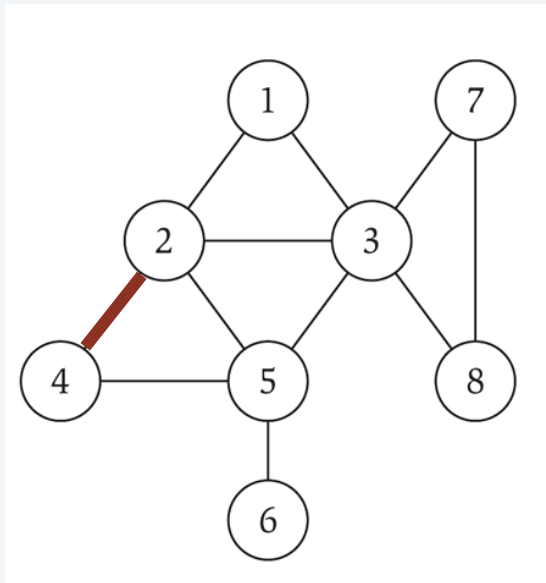


Paths and connectivity

Def. A **path** in an undirected graph $G = (V, E)$ is a sequence of nodes v_1, v_2, \dots, v_k with the property that each consecutive pair v_{i-1}, v_i is joined by an edge in E .


Def. A path is **simple** if all nodes are distinct.

Def. An undirected graph is **connected** if for every pair of nodes u and v , there is a path between u and v .

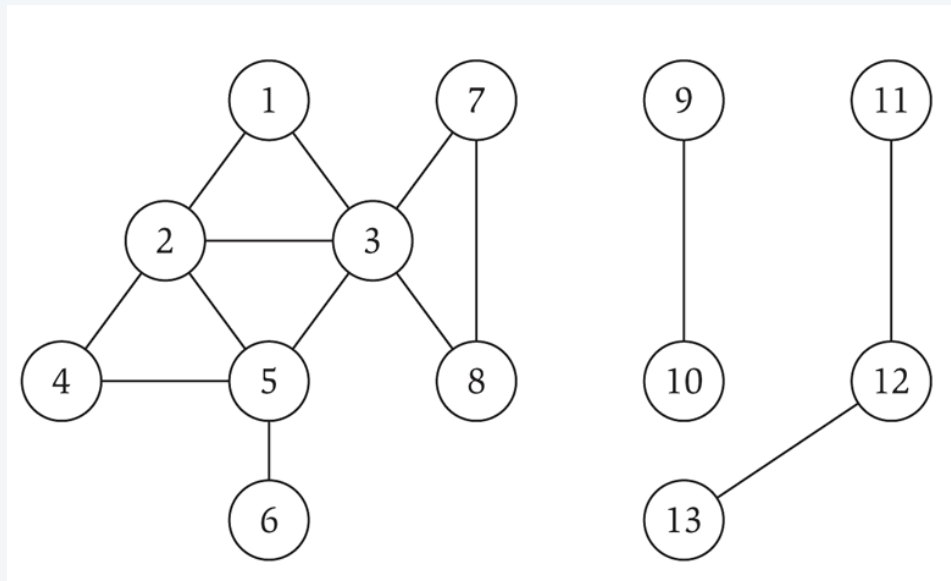

Cycles

Def. A **cycle** is a path v_1, v_2, \dots, v_k in which $v_1 = v_k$, $k > 2$, and the first $k - 1$ nodes are all distinct.

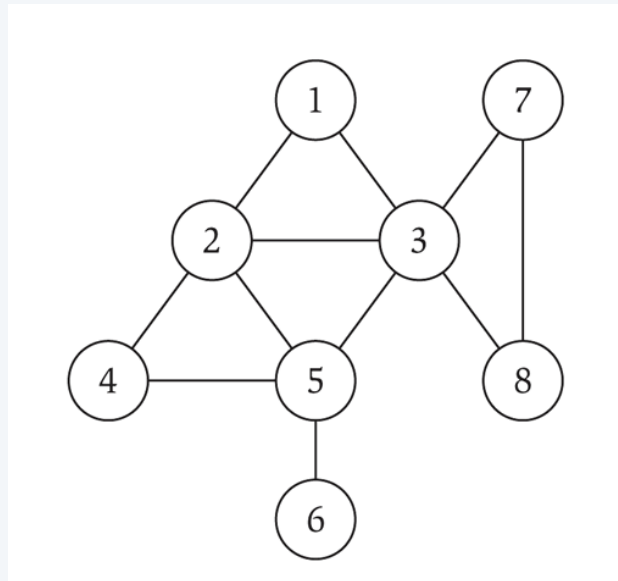


cycle C = 1-2-4-5-3-1

Trees

Def. An undirected graph is a **tree** if it is connected and does not contain a cycle.

Theorem. Let G be an undirected graph on n nodes. Any two of the following statements imply the third.


- G is connected.
- G does not contain a cycle.
- G has $n - 1$ edges.

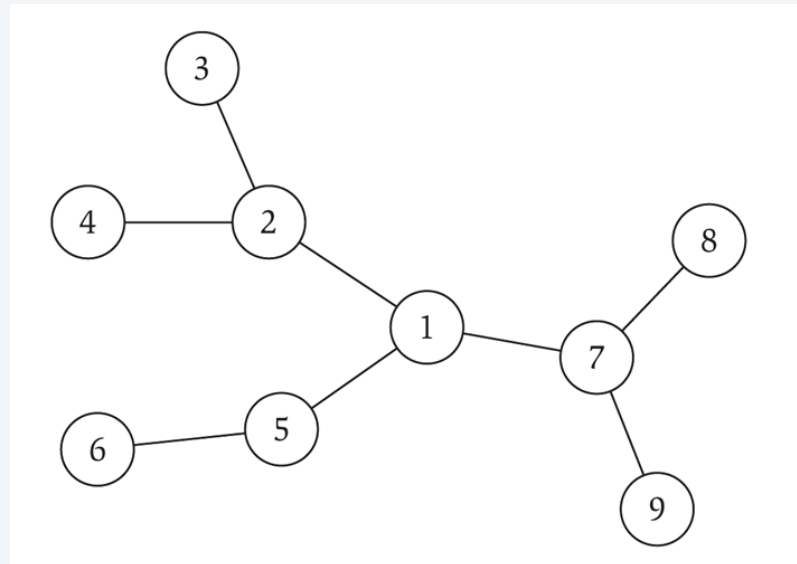

Rooted trees

Given a tree T , choose a root node r and orient each edge away from r .

Importance. Models hierarchical structure.

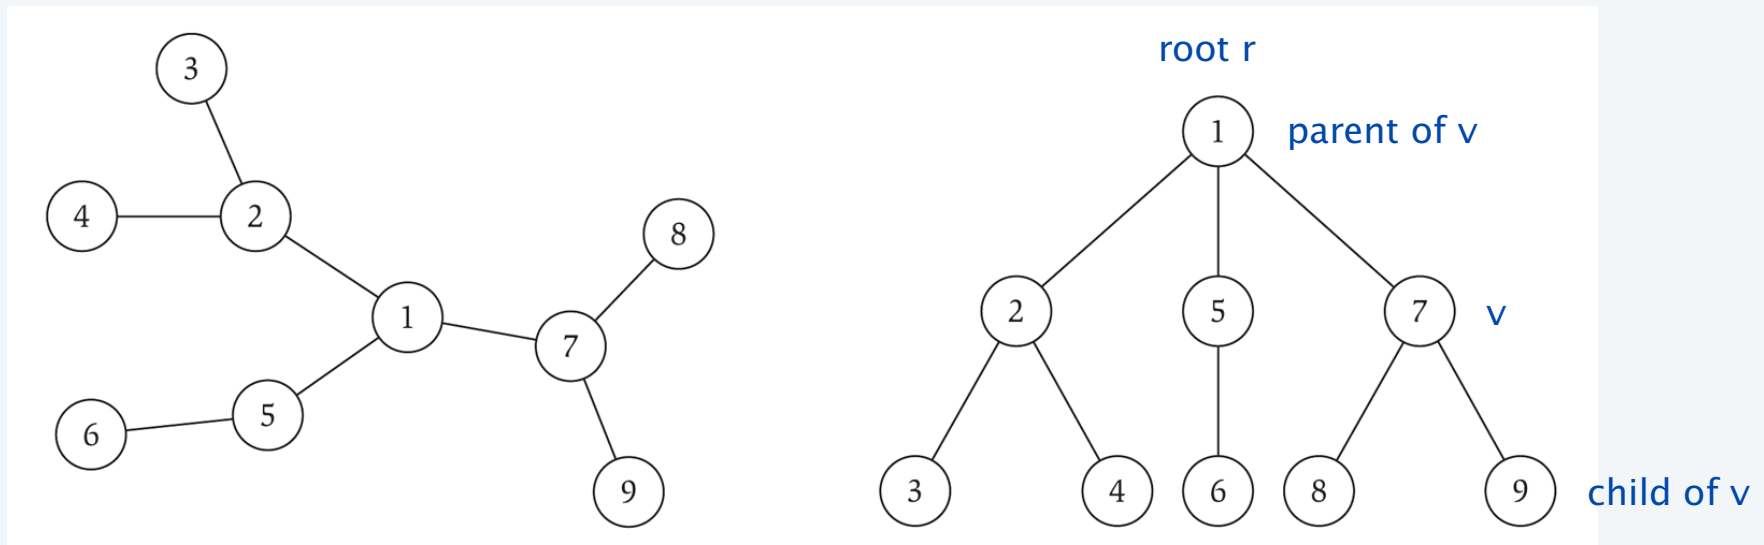


a tree

the same tree, rooted at 1



Phylogeny trees


Describe evolutionary history of species.

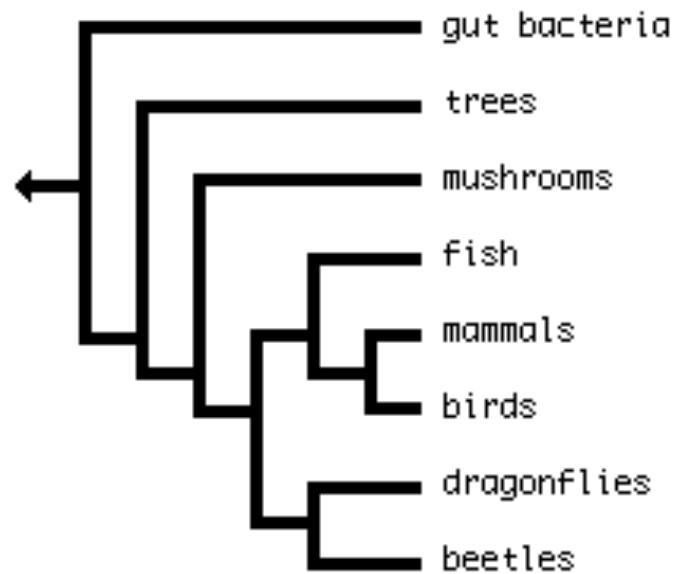

GUI containment hierarchy

Describe organization of GUI widgets.

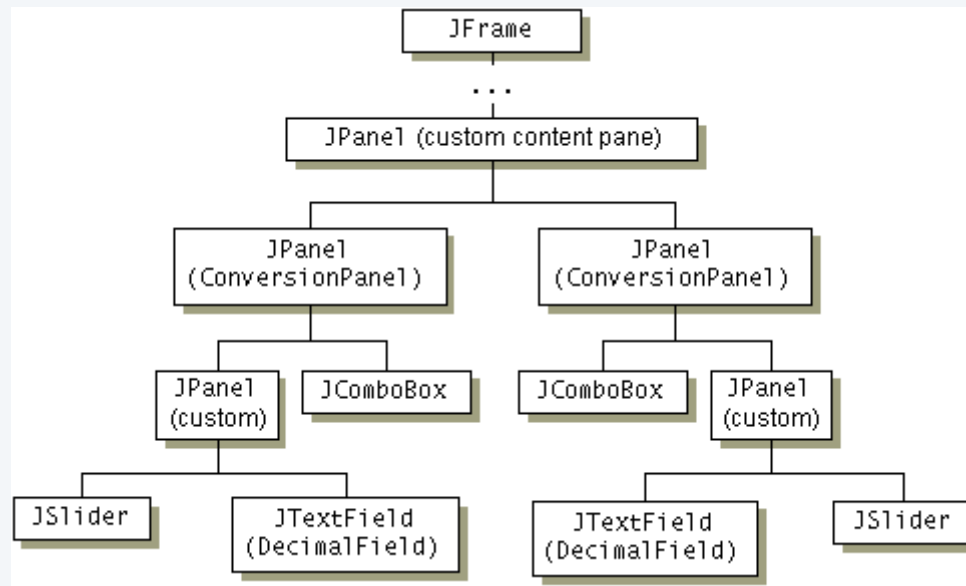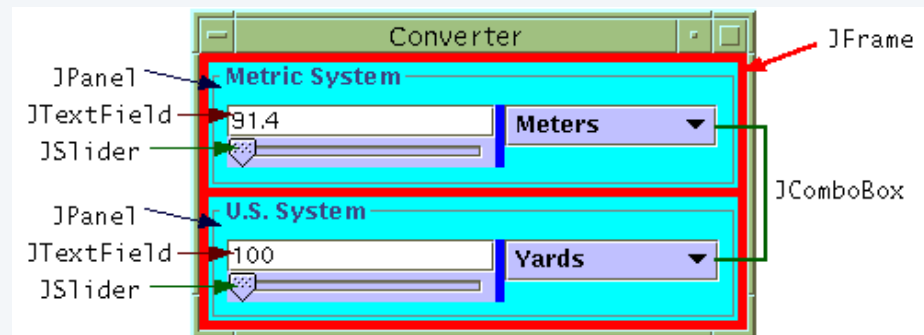

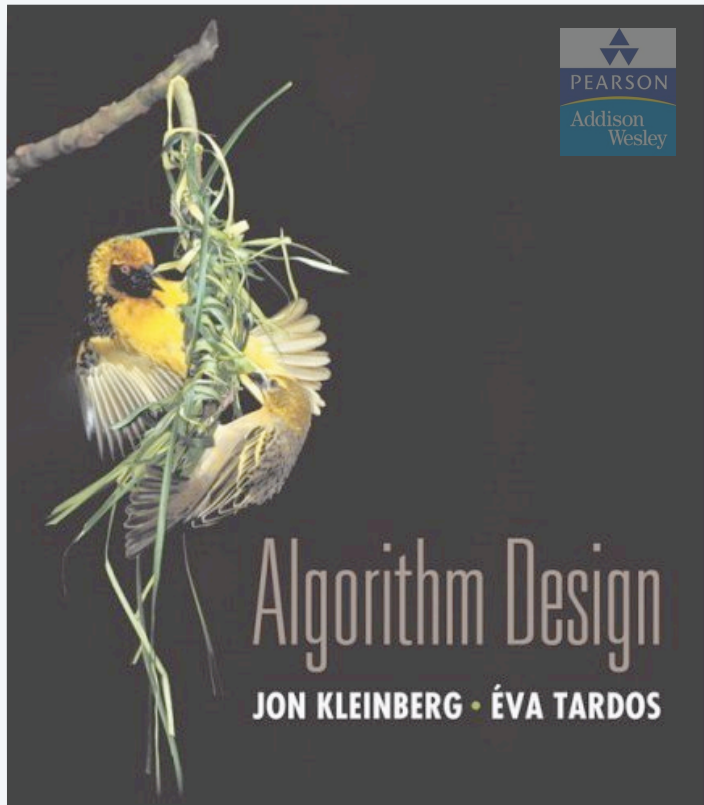

SECTION 3.2

3. GRAPHS

- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ *testing bipartiteness*
- ▶ *connectivity in directed graphs*
- ▶ *DAGs and topological ordering*

Connectivity

s-t connectivity problem. Given two node s and t , is there a path between s and t ?

s-t shortest path problem. Given two node s and t , what is the length of the shortest path between s and t ?

Applications.


- Friendster.
- Maze traversal.
- Kevin Bacon number.
- Fewest number of hops in a communication network.

Breadth-first search

BFS intuition. Explore outward from s in all possible directions, adding nodes one "layer" at a time.

BFS algorithm.



- $L_0 = \{ s \}$.
- $L_1 =$ all neighbors of L_0 .
- $L_2 =$ all nodes that do not belong to L_0 or L_1 , and that have an edge to a node in L_1 .
- $L_{i+1} =$ all nodes that do not belong to an earlier layer, and that have an edge to a node in L_i .

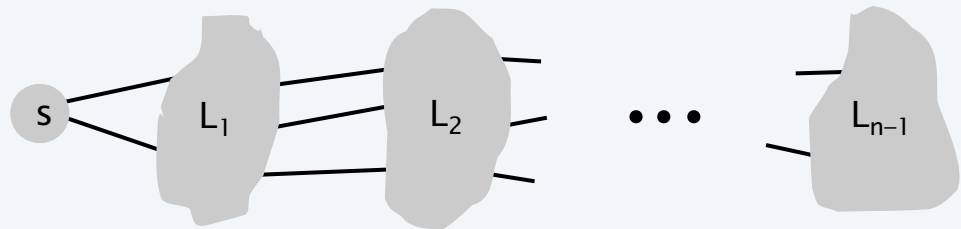


Theorem. For each i , L_i consists of all nodes at distance exactly i from s . There is a path from s to t iff t appears in some layer.

Breadth-first search


Property. Let T be a BFS tree of $G = (V, E)$, and let (x, y) be an edge of G . Then, the level of x and y differ by at most 1.

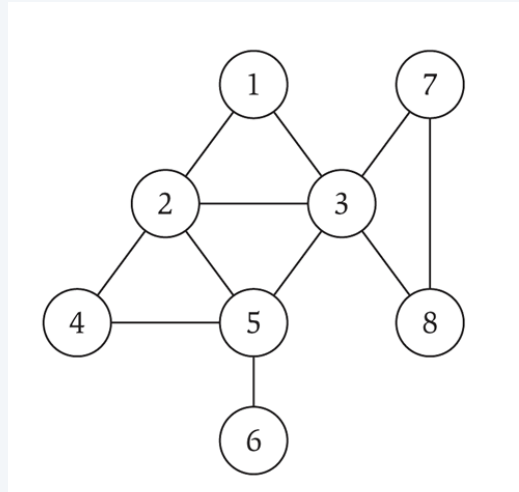

(a)

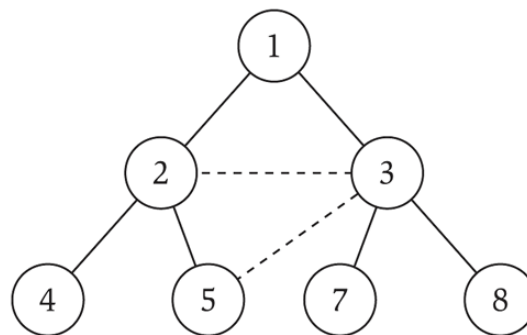

(b)

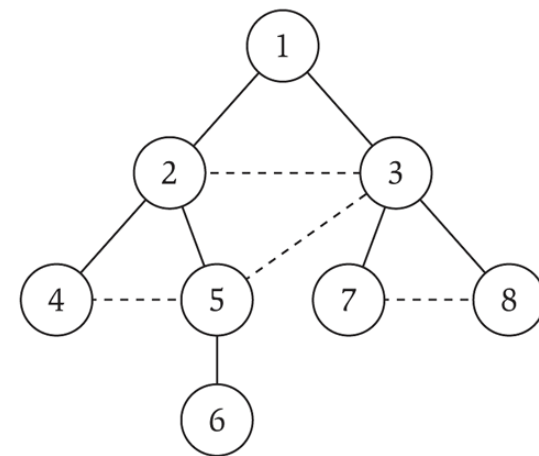

(c)

L_0

L_1

L_2

L_3

Breadth-first search: analysis

Theorem. The above implementation of BFS runs in $O(m + n)$ time if the graph is given by its adjacency representation.


Pf.

- Easy to prove $O(n^2)$ running time:
 - at most n lists $L[i]$
 - each node occurs on at most one list; for loop runs $\leq n$ times
 - when we consider node u , there are $\leq n$ incident edges (u, v) , and we spend $O(1)$ processing each edge
- Actually runs in $O(m + n)$ time:
 - when we consider node u , there are $\text{degree}(u)$ incident edges (u, v)
 - total time processing edges is $\sum_{u \in V} \text{degree}(u) = 2m$. ■

↑
each edge (u, v) is counted exactly twice
in sum: once in $\text{degree}(u)$ and once in $\text{degree}(v)$

Connected component

Connected component. Find all nodes reachable from s .

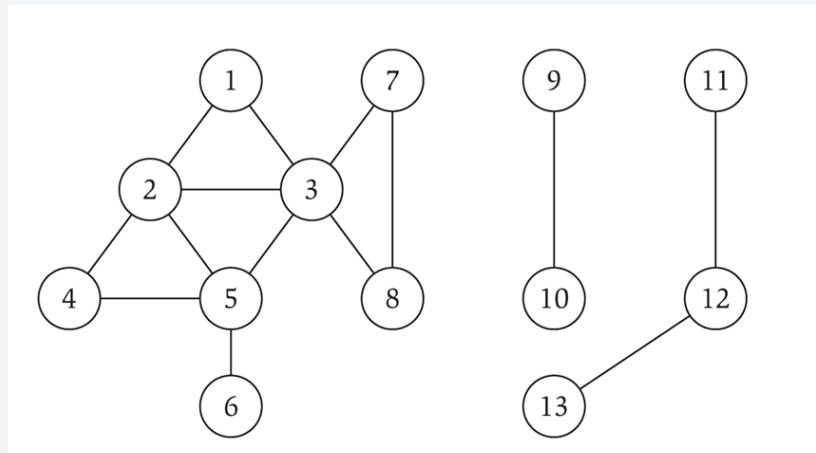



Connected component containing node 1 = $\{ 1, 2, 3, 4, 5, 6, 7, 8 \}$.

Flood fill

Flood fill. Given lime green pixel in an image, change color of entire blob of neighboring lime pixels to blue.

- Node: pixel.
- Edge: two neighboring lime pixels.
- Blob: connected component of lime pixels.

recolor lime green blob to blue

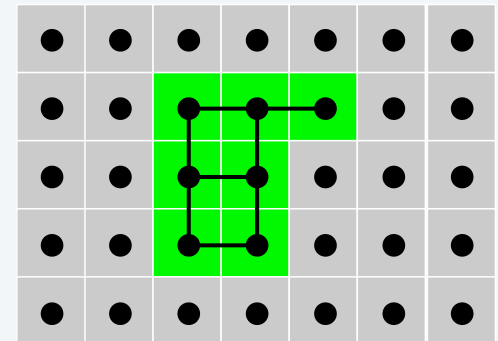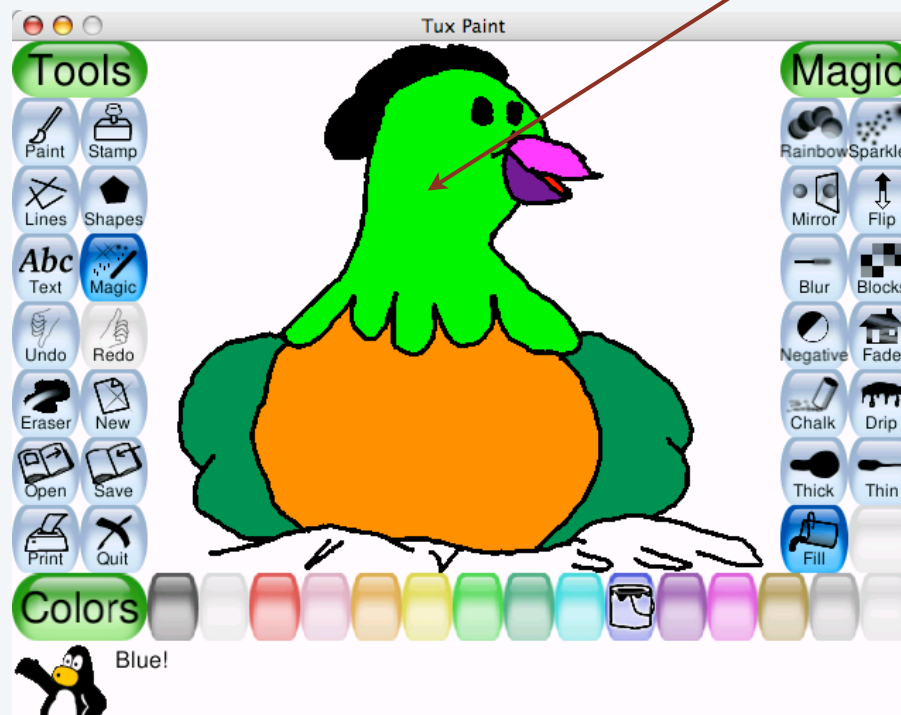


Flood fill

Flood fill. Given lime green pixel in an image, change color of entire blob of neighboring lime pixels to blue.

- Node: pixel.
- Edge: two neighboring lime pixels.
- Blob: connected component of lime pixels.


recolor lime green blob to blue

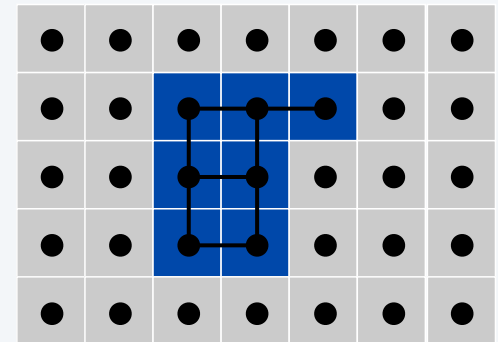

Connected component


Connected component. Find all nodes reachable from s .

```
R will consist of nodes to which s has a path
Initially  $R = \{s\}$ 
While there is an edge  $(u, v)$  where  $u \in R$  and  $v \notin R$ 
    Add  $v$  to  $R$ 
Endwhile
```

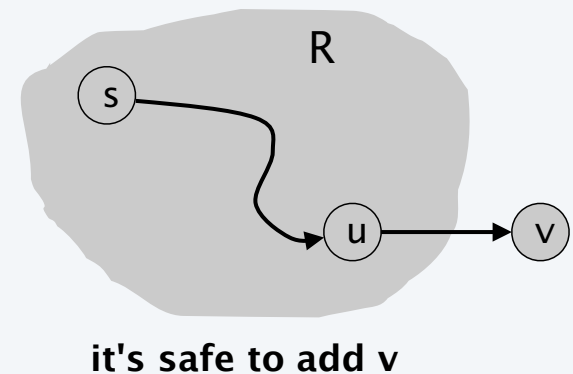

Theorem. Upon termination, R is the connected component containing s .

- BFS = explore in order of distance from s .
- DFS = explore in a different way.

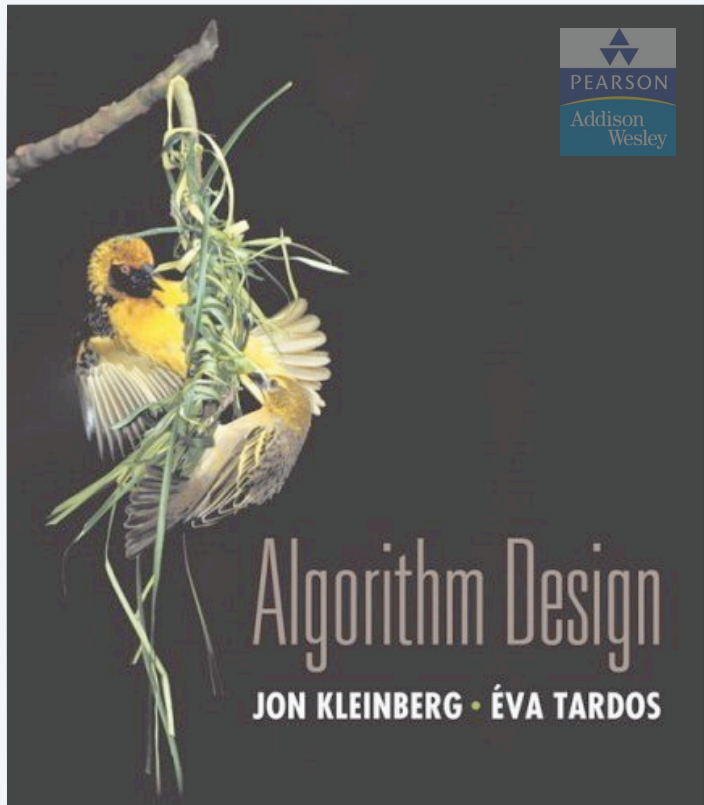

SECTION 3.4

3. GRAPHS


- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ ***testing bipartiteness***
- ▶ *connectivity in directed graphs*
- ▶ *DAGs and topological ordering*

Bipartite graphs

Def. An undirected graph $G = (V, E)$ is **bipartite** if the nodes can be colored blue or white such that every edge has one white and one blue end.

Applications.

- Scheduling: machines = blue, jobs = white.

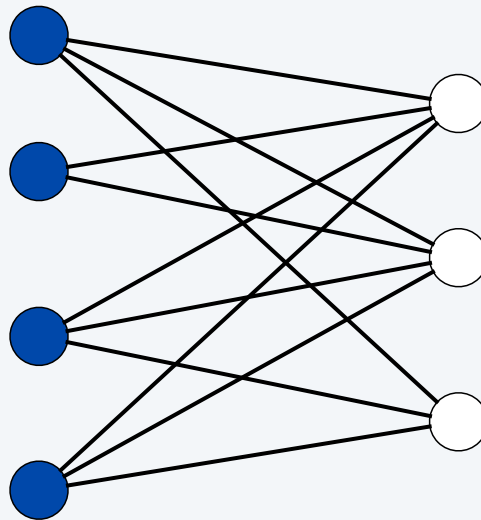


a bipartite graph

Testing bipartiteness


Many graph problems become:

- Easier if the underlying graph is bipartite (matching).
- Tractable if the underlying graph is bipartite (independent set).

Before attempting to design an algorithm, we need to understand structure of bipartite graphs.

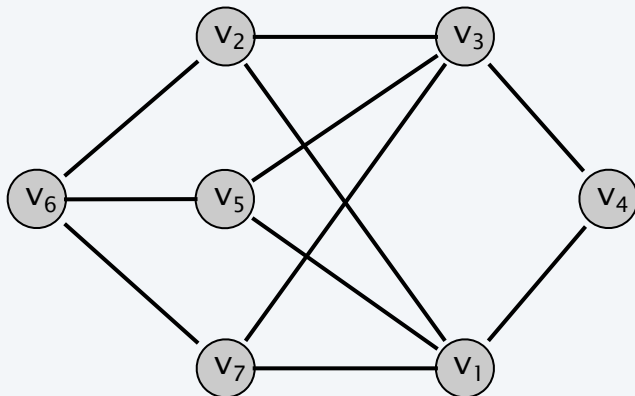

a bipartite graph G

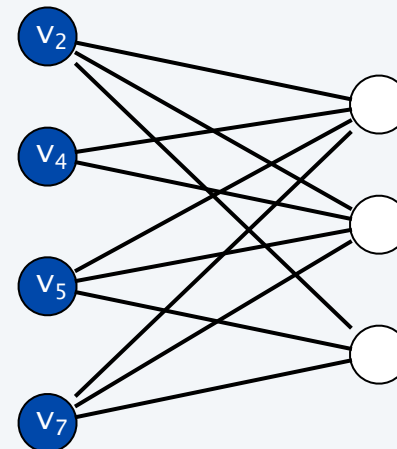


another drawing of G


An obstruction to bipartiteness

Lemma. If a graph G is bipartite, it cannot contain an odd length cycle.

Pf. Not possible to 2-color the odd cycle, let alone G .

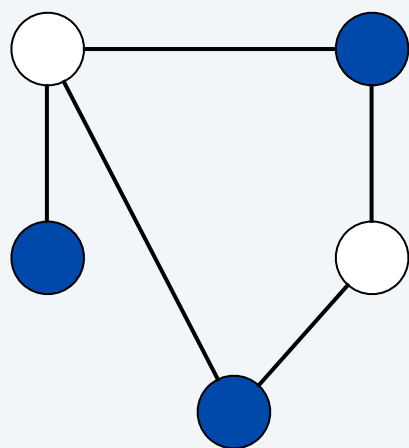

bipartite
(2-colorable)

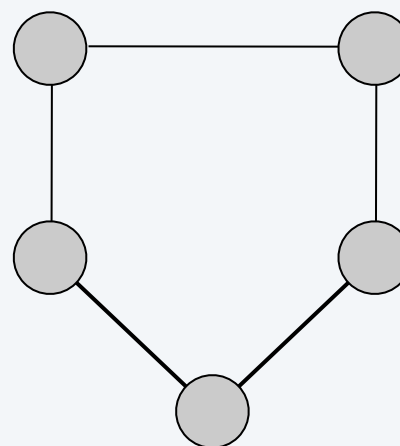


not bipartite
(not 2-colorable)


Bipartite graphs

Lemma. Let G be a connected graph, and let L_0, \dots, L_k be the layers produced by BFS starting at node s . Exactly one of the following holds.

- (i) No edge of G joins two nodes of the same layer, and G is bipartite.
- (ii) An edge of G joins two nodes of the same layer, and G contains an odd-length cycle (and hence is not bipartite).

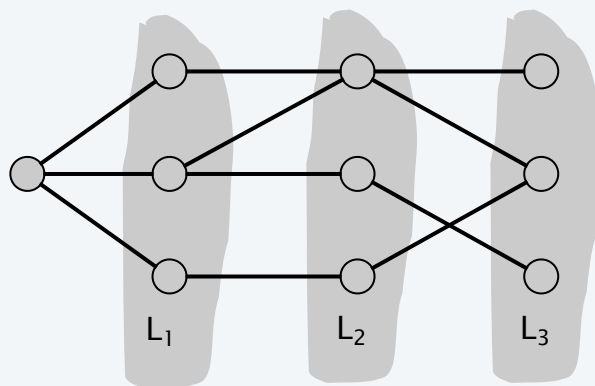

Case (i)

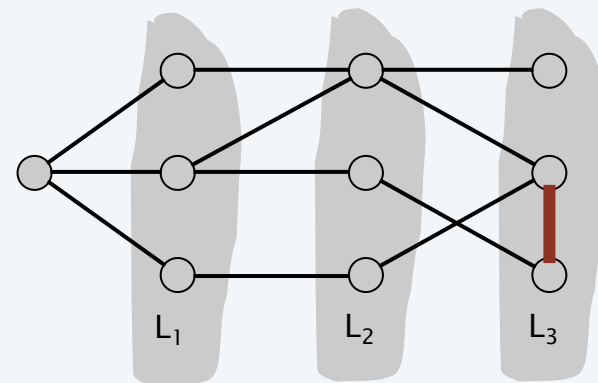

Case (ii)


Bipartite graphs

Lemma. Let G be a connected graph, and let L_0, \dots, L_k be the layers produced by BFS starting at node s . Exactly one of the following holds.

- (i) No edge of G joins two nodes of the same layer, and G is bipartite.
- (ii) An edge of G joins two nodes of the same layer, and G contains an odd-length cycle (and hence is not bipartite).

Pf. (i)


- Suppose no edge joins two nodes in adjacent layers.
- By previous lemma, this implies all edges join nodes on same level.
- Bipartition: red = nodes on odd levels, blue = nodes on even levels.

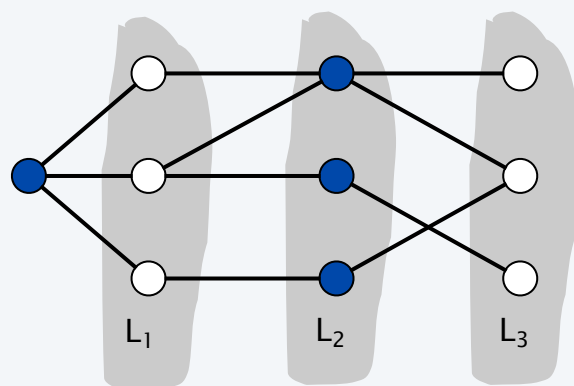


Case (i)

The only obstruction to bipartiteness


Corollary. A graph G is bipartite iff it contains no odd length cycle.

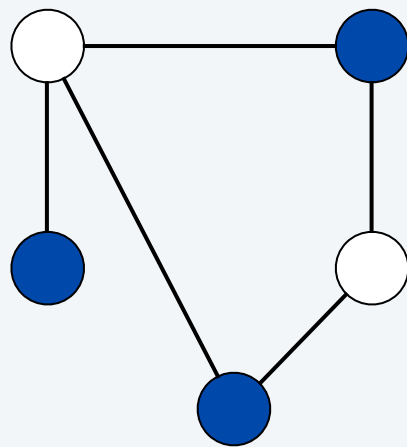

bipartite
(2-colorable)

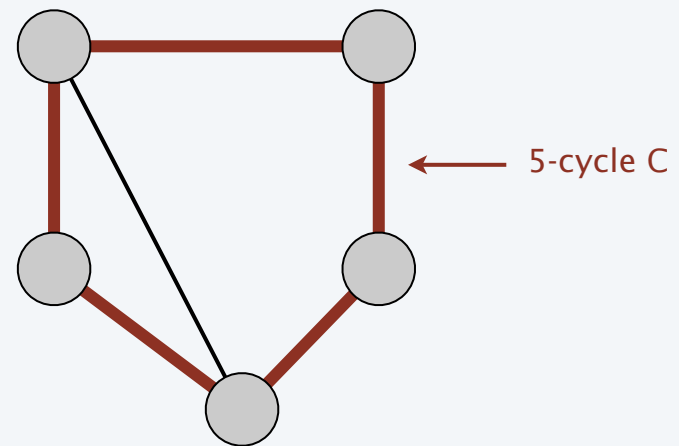

not bipartite
(not 2-colorable)

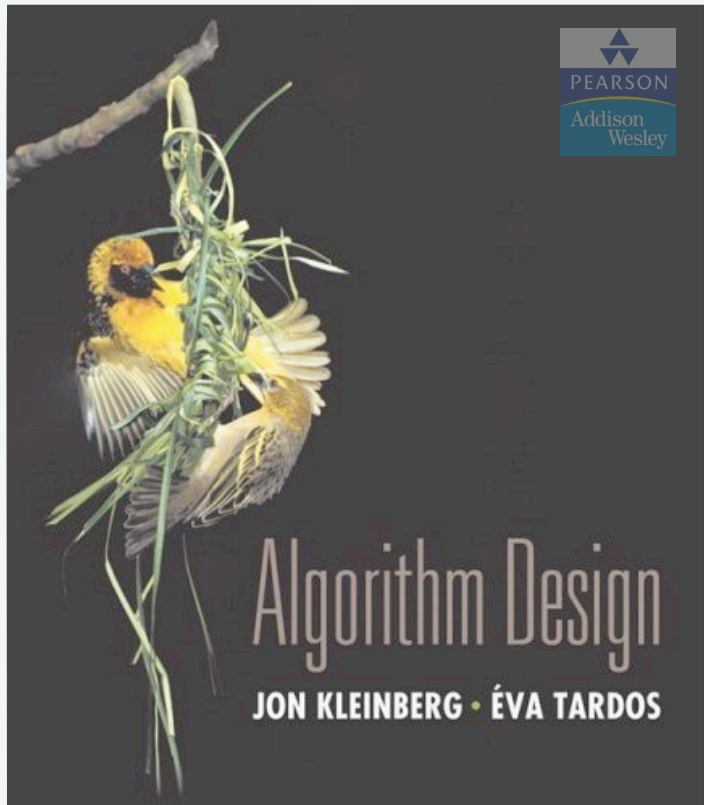

SECTION 3.5


3. GRAPHS

- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ *testing bipartiteness*
- ▶ ***connectivity in directed graphs***
- ▶ *DAGs and topological ordering*

Directed graphs

Notation. $G = (V, E)$.

- Edge (u, v) leaves node u and enters node v .

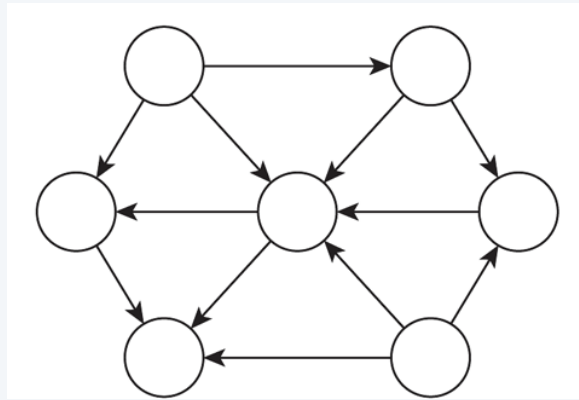


Ex. Web graph: hyperlink points from one web page to another.

- Orientation of edges is crucial.
- Modern web search engines exploit hyperlink structure to rank web pages by importance.

World wide web


Web graph.

- Node: web page.
- Edge: hyperlink from one page to another (orientation is crucial).
- Modern search engines exploit hyperlink structure to rank web pages by importance.

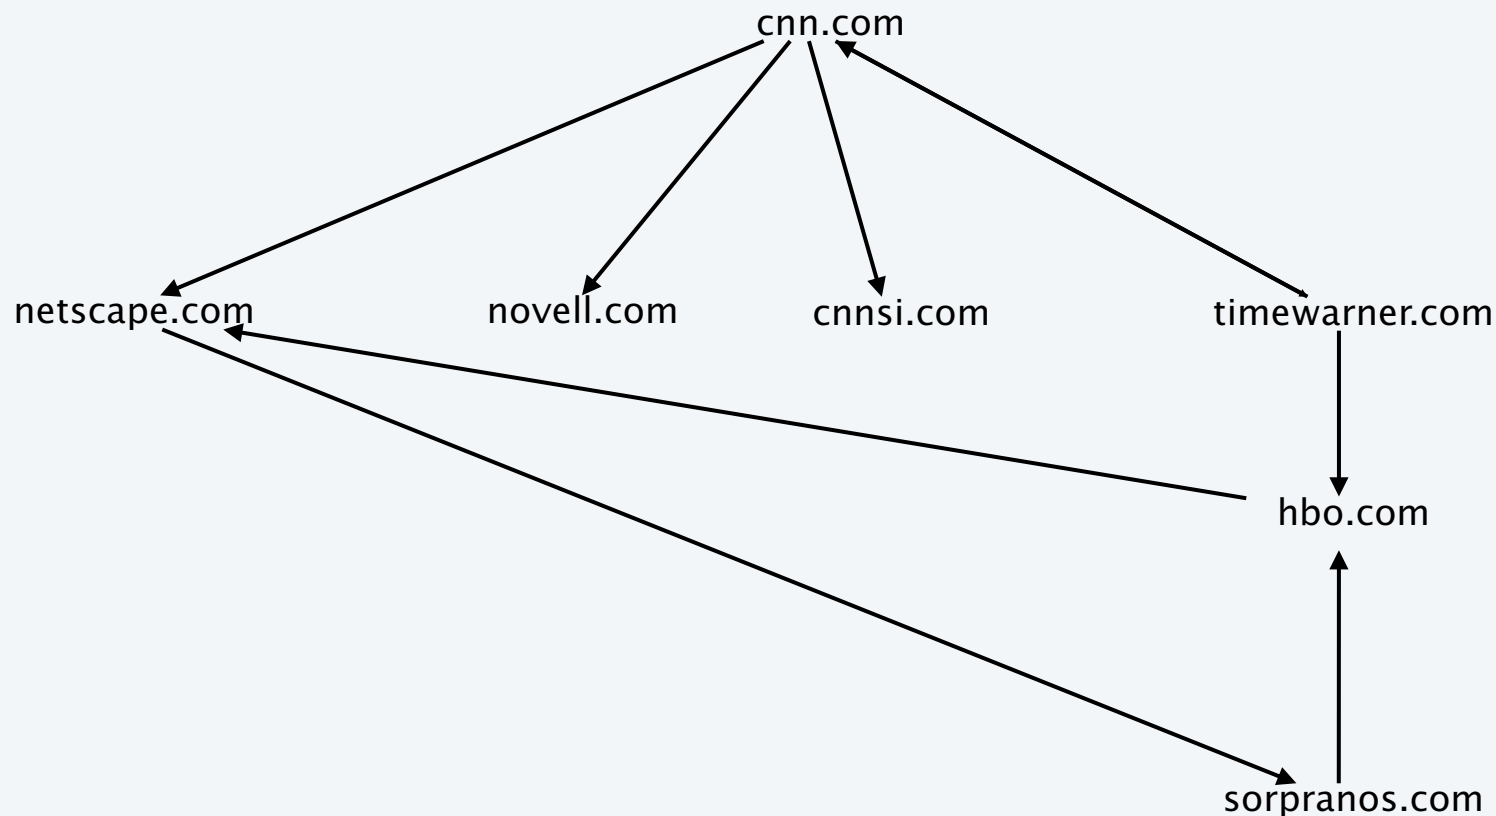


Road network

Vertex = intersection; edge = one-way street.

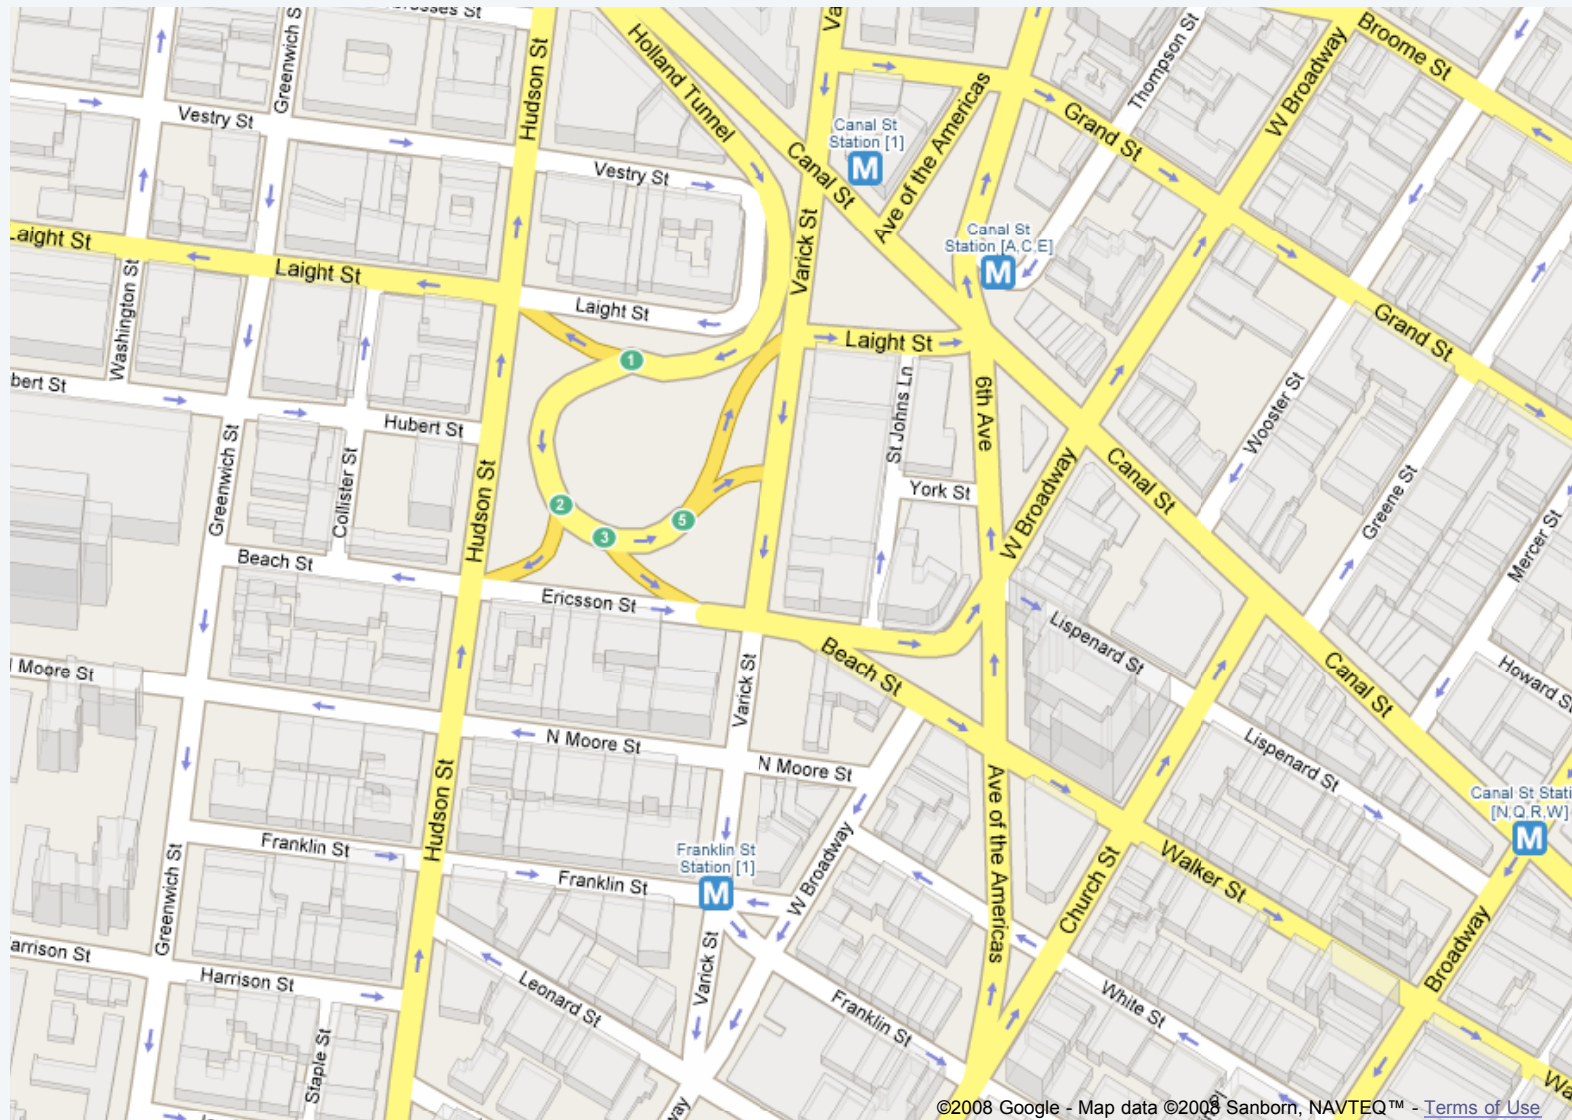

Political blogosphere graph

Vertex = political blog; edge = link.

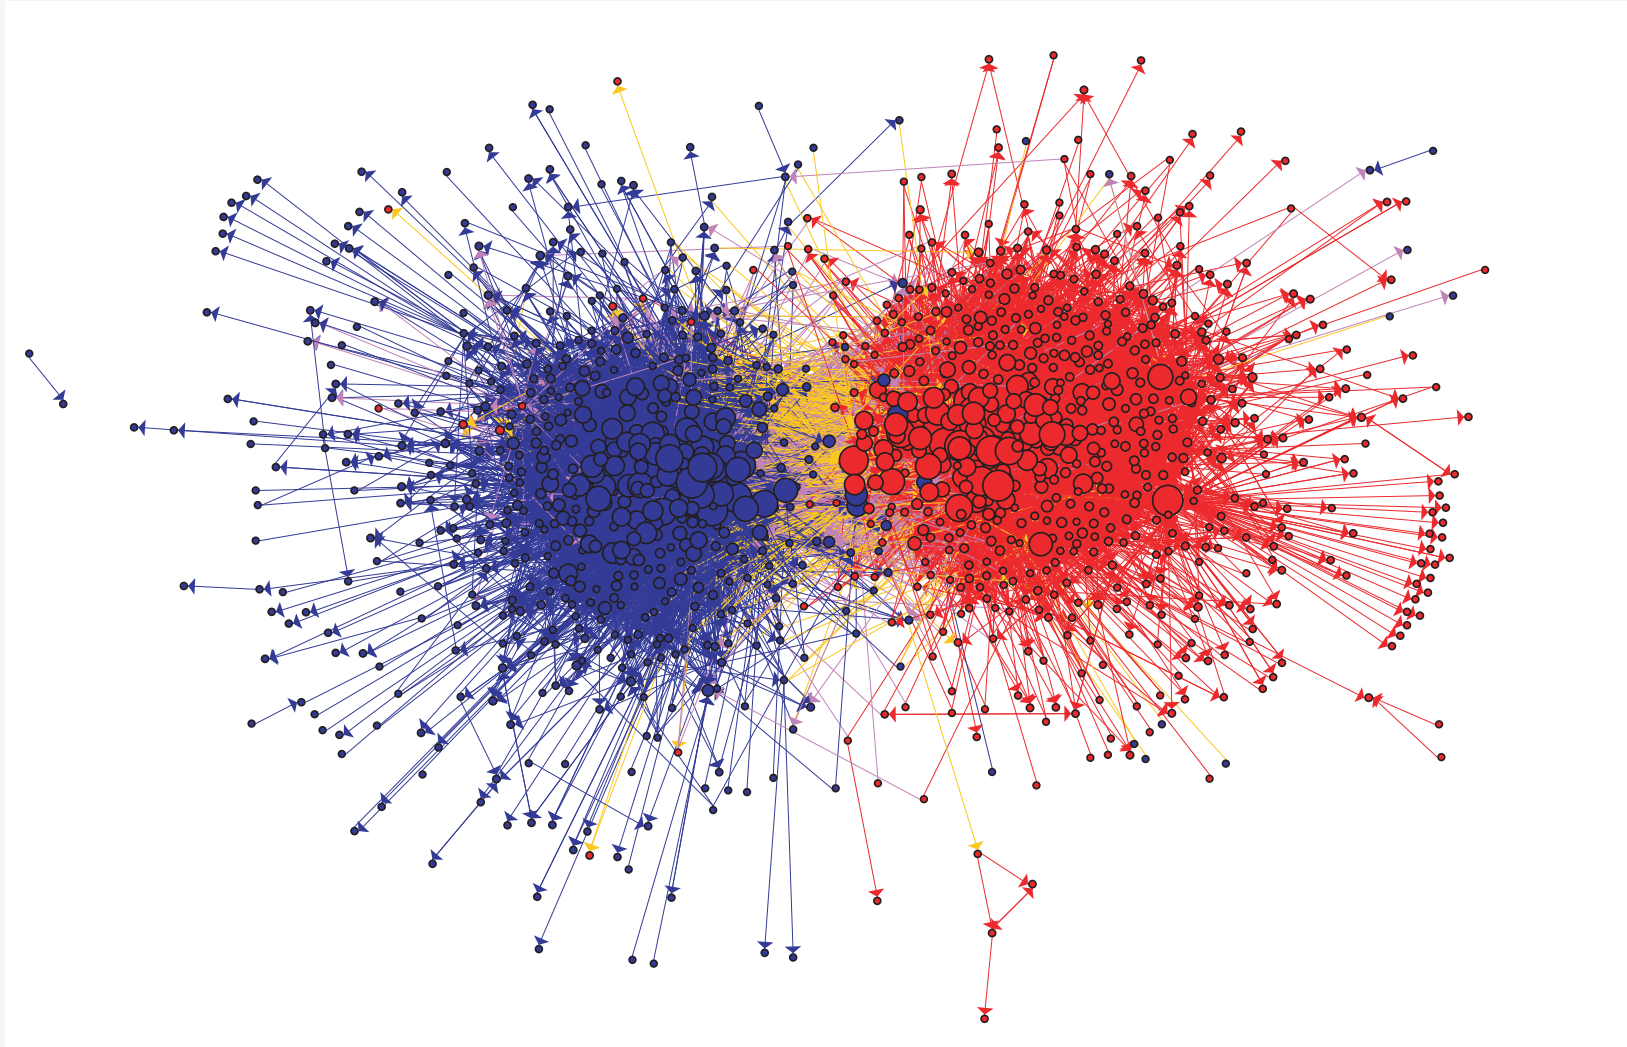


The Political Blogosphere and the 2004 U.S. Election: Divided They Blog, Adamic and Glance, 2005

Ecological food web

Food web graph.

- Node = species.
- Edge = from prey to predator.

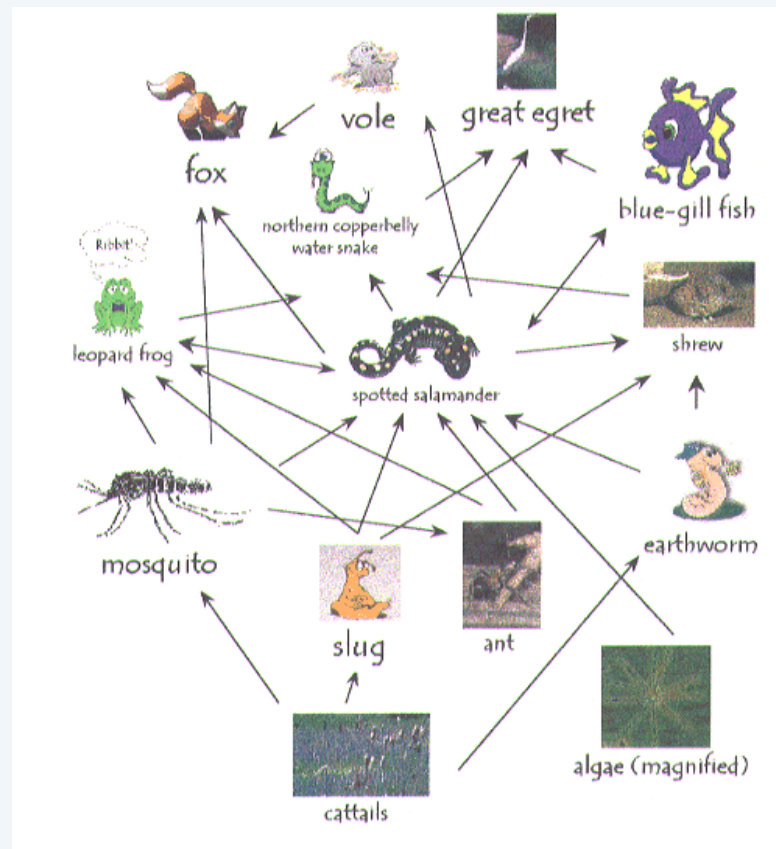

Reference: <http://www.twingroves.district96.k12.il.us/Wetlands/Salamander/SalGraphics/salfoodweb.gif>

Some directed graph applications

directed graph	node	directed edge
transportation	street intersection	one-way street
web	web page	hyperlink
food web	species	predator-prey relationship
WordNet	synset	hypernym
scheduling	task	precedence constraint
financial	bank	transaction
cell phone	person	placed call
infectious disease	person	infection
game	board position	legal move
citation	journal article	citation
object graph	object	pointer
inheritance hierarchy	class	inherits from
control flow	code block	jump

Graph search

Directed reachability. Given a node s , find all nodes reachable from s .

Directed s-t shortest path problem. Given two node s and t , what is the length of the shortest path from s and t ?

Graph search. BFS extends naturally to directed graphs.

Web crawler. Start from web page s . Find all web pages linked from s , either directly or indirectly.

Strong connectivity

Def. Nodes u and v are **mutually reachable** if there is a both path from u to v and also a path from v to u .


Def. A graph is **strongly connected** if every pair of nodes is mutually reachable.

Lemma. Let s be any node. G is strongly connected iff every node is reachable from s , and s is reachable from every node.

Pf. \Rightarrow Follows from definition.

Pf. \Leftarrow Path from u to v : concatenate $u \rightarrow s$ path with $s \rightarrow v$ path.

Path from v to u : concatenate $v \rightarrow s$ path with $s \rightarrow u$ path. ■

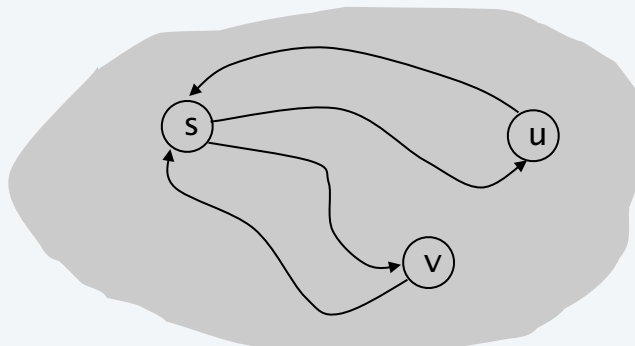


ok if paths overlap


Strong connectivity: algorithm

Theorem. Can determine if G is strongly connected in $O(m + n)$ time.
Pf.

- Pick any node s .
- Run BFS from s in G .
- Run BFS from s in $G^{reverse}$. ↙ reverse orientation of every edge in G
- Return true iff all nodes reached in both BFS executions.
- Correctness follows immediately from previous lemma. ▀

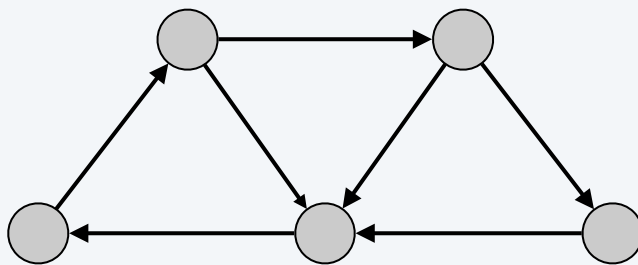


strongly connected

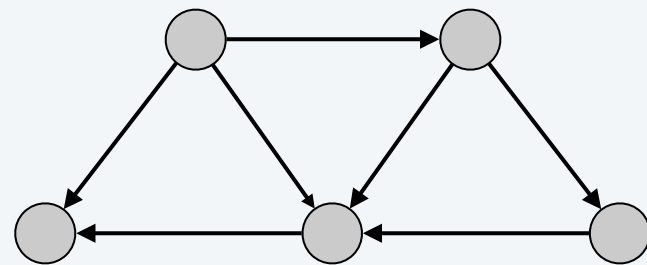

not strongly connected

Strong components

Def. A **strong component** is a maximal subset of mutually reachable nodes.

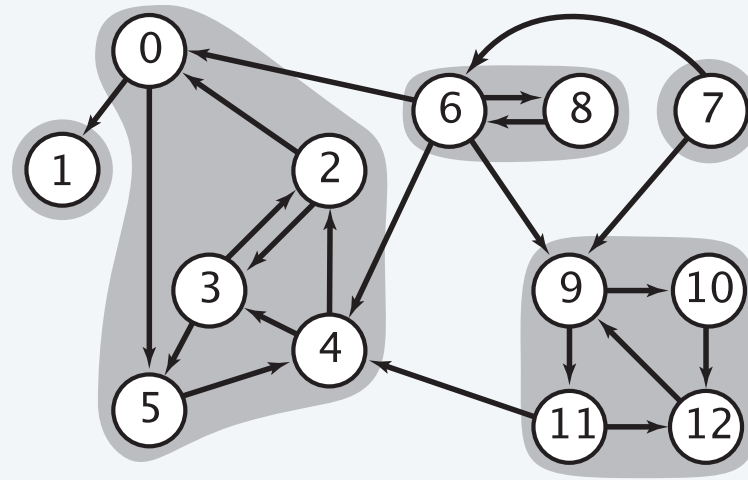


Theorem. [Tarjan 1972] Can find all strong components in $O(m + n)$ time.

SIAM J. COMPUT.
Vol. 1, No. 2, June 1972

DEPTH-FIRST SEARCH AND LINEAR GRAPH ALGORITHMS*

ROBERT TARJAN†

Abstract. The value of depth-first search or “backtracking” as a technique for solving problems is illustrated by two examples. An improved version of an algorithm for finding the strongly connected components of a directed graph and an algorithm for finding the biconnected components of an undirect graph are presented. The space and time requirements of both algorithms are bounded by $k_1V + k_2E + k_3$ for some constants k_1, k_2 , and k_3 , where V is the number of vertices and E is the number of edges of the graph being examined.

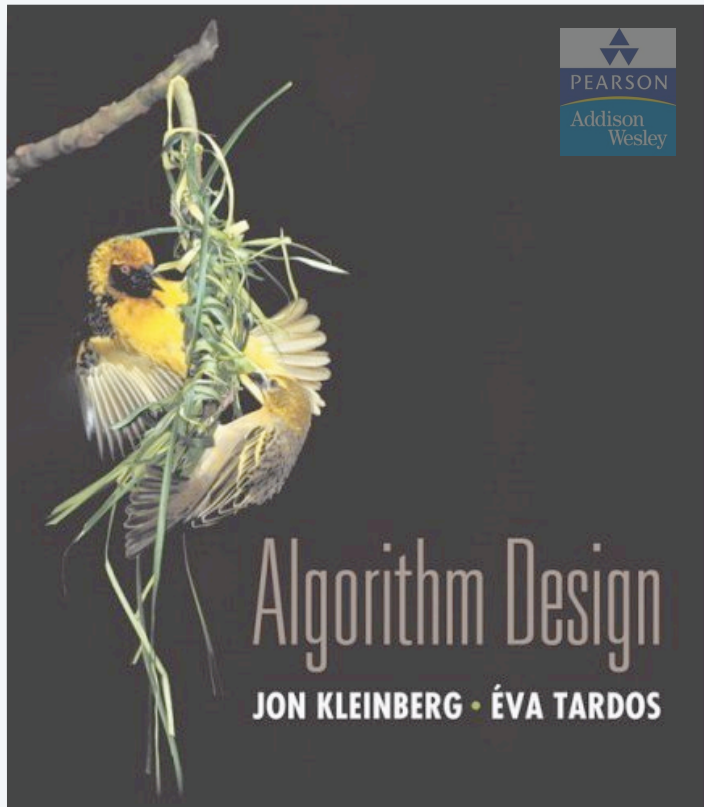

SECTION 3.6


3. GRAPHS

- ▶ *basic definitions and applications*
- ▶ *graph connectivity and graph traversal*
- ▶ *testing bipartiteness*
- ▶ *connectivity in directed graphs*
- ▶ *DAGs and topological ordering*


Directed acyclic graphs

Def. A **DAG** is a directed graph that contains no directed cycles.

Def. A **topological order** of a directed graph $G = (V, E)$ is an ordering of its nodes as v_1, v_2, \dots, v_n so that for every edge (v_i, v_j) we have $i < j$.

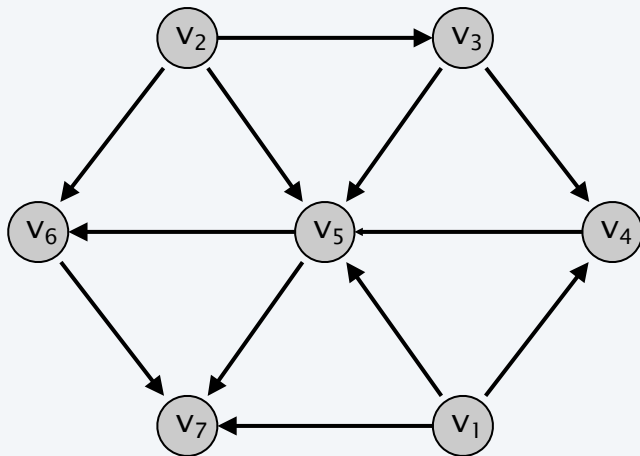

a DAG

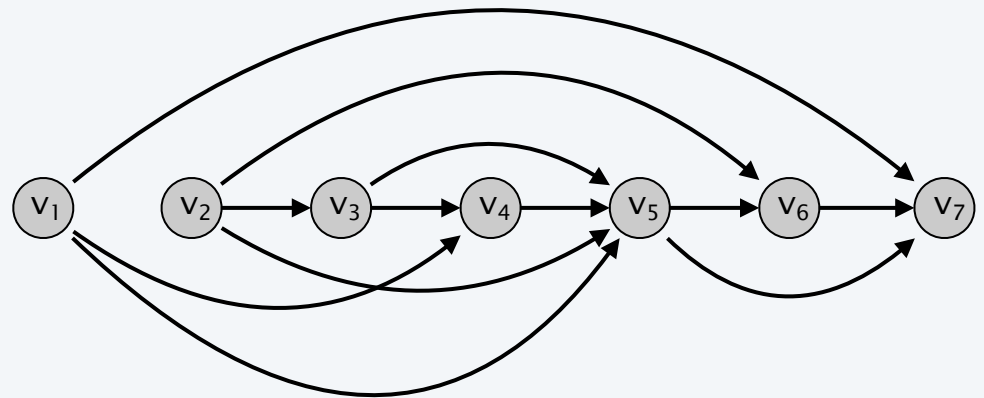

a topological ordering

Precedence constraints

Precedence constraints. Edge (v_i, v_j) means task v_i must occur before v_j .

Applications.


- Course prerequisite graph: course v_i must be taken before v_j .
- Compilation: module v_i must be compiled before v_j . Pipeline of computing jobs: output of job v_i needed to determine input of job v_j .

Directed acyclic graphs

Lemma. If G has a topological order, then G is a DAG.

Pf. [by contradiction]

- Suppose that G has a topological order v_1, v_2, \dots, v_n and that G also has a directed cycle C . Let's see what happens.
- Let v_i be the lowest-indexed node in C , and let v_j be the node just before v_i ; thus (v_j, v_i) is an edge.
- By our choice of i , we have $i < j$.
- On the other hand, since (v_j, v_i) is an edge and v_1, v_2, \dots, v_n is a topological order, we must have $j < i$, a contradiction. ■

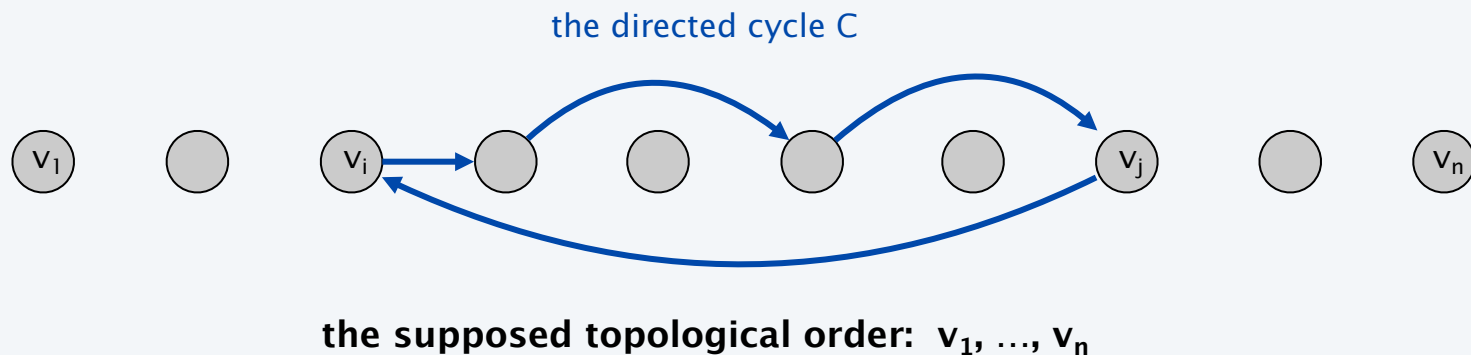

Directed acyclic graphs

Lemma. If G has a topological order, then G is a DAG.

Q. Does every DAG have a topological ordering?


Q. If so, how do we compute one?

Directed acyclic graphs

Lemma. If G is a DAG, then G has a node with no entering edges.

Pf. [by contradiction]


- Suppose that G is a DAG and every node has at least one entering edge. Let's see what happens.
- Pick any node v , and begin following edges backward from v . Since v has at least one entering edge (u, v) we can walk backward to u .
- Then, since u has at least one entering edge (x, u) , we can walk backward to x .
- Repeat until we visit a node, say w , twice.
- Let C denote the sequence of nodes encountered between successive visits to w . C is a cycle. ▀

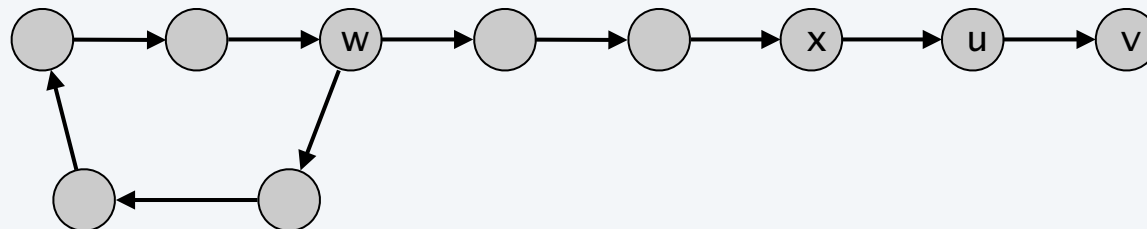

Directed acyclic graphs

Lemma. If G is a DAG, then G has a topological ordering.

Pf. [by induction on n]



- Base case: true if $n = 1$.
- Given DAG on $n > 1$ nodes, find a node v with no entering edges.
- $G - \{v\}$ is a DAG, since deleting v cannot create cycles.
- By inductive hypothesis, $G - \{v\}$ has a topological ordering.
- Place v first in topological ordering; then append nodes of $G - \{v\}$
- in topological order. This is valid since v has no entering edges. ■

To compute a topological ordering of G :

Find a node v with no incoming edges and order it first

Delete v from G

Recursively compute a topological ordering of $G - \{v\}$
and append this order after v

